



Bobcat®

BOB-TACH™ BACKHOE ATTACHMENT

Shown with optional clamp

silmaquinas

(31) 3615-2000

www.silmaquinas.com.br




One Tough Animal™

Specifications

Bob-Tach Backhoe

Shipping Weight (without bucket)	680 lb. (308 kg)
Operating Weight (without bucket)	630 lb. (286 kg)
Swing Angle	48° left or right
Length	77.0 in. (1957 mm)
Width	50.0 in. (1270 mm)
Height	17.8 in. (452 mm)
Dig Depth	72.0 in. (1830 mm)
Reach	77.0 in. (1957 mm)
Dig Force Bucket	4878 lbf.
Bolt-on X-Change® System	Standard
Available Bucket Widths	13 in. (330 mm), 16 in. (406 mm), 20 in. (508 mm)

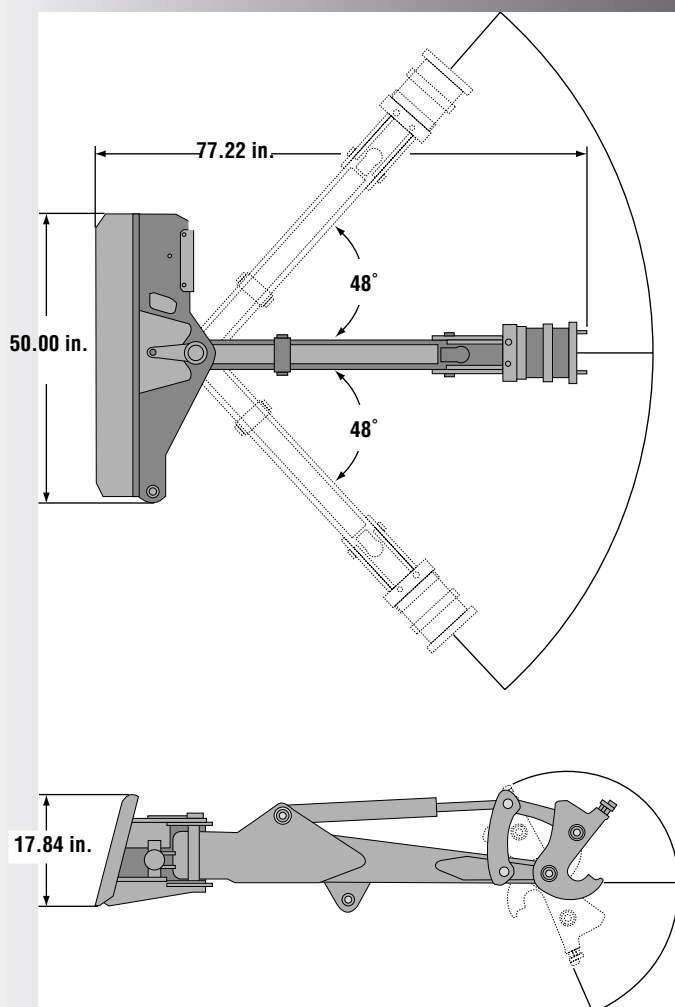

(31) 3615-2000

www.silmaquinas.com.br

Bob-Tach Backhoe Attachment...the low-cost option for equipment owners!

What makes the Bob-Tach Backhoe unique is its ability to swing the dipper left or right 48 degrees. That means the operator doesn't have to skid the loader to dump the spoil, as necessary with some low-cost mini-hoe attachments. This convenient feature not only makes the operation of the backhoe more efficient, it also means less ground disturbance.

Unlike most standard backhoe attachments for loaders, the Bob-Tach Backhoe doesn't require a mounting kit or stabilizers. Instead, it mounts directly to the loader with the fast, easy-to-use Bob-Tach mounting system.

Cost-effective and convenient, the Bob-Tach Backhoe is designed as a money-saving option for rental, landscaping, nurseries, sewage system and septic tank contractors, water and power line contractors, and electrical contractors.

NOTE - Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat units may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

The Bobcat® Attachments Advantage: Bobcat attachments are engineered and manufactured to fit Bobcat loaders for optimum job performance, dependability and durability.



Optional clamp provides added versatility by allowing picking and placement of materials such as logs and rocks.



Bob-Tach™ Backhoe Attachment fits these carrier models:

Skid-Steer Loaders:

S150
S160
S175
S185
S205

Compact Track Loaders:

T180
T190

All loaders must be equipped with an Attachment Control Kit.