



Bobcat®

TRENCH COMPACTOR ATTACHMENT




Bobcat

One Tough Animal™

Specifications

Trench Compactor

Weight	1400 lb. (635 kg)
Length	57 in. (1448 mm)
Width	48 in. (1219 mm)
Height	59 in. (1499 mm)
Hydraulic Flow	11–22 gpm (83 L/min.)
Working Depth	27 in. (686 mm)
Working Width	
Standard Pad	4.5–6.75 in. (114–171 mm)
Wide Pad	8.0–10.25 in. (203–260 mm)
Wheel Diameter	46.5 in. (1181 mm)
Dynamic Force	6000 lb. (2727 kg)
Vibrations/Min.	2200 @ 18 gpm

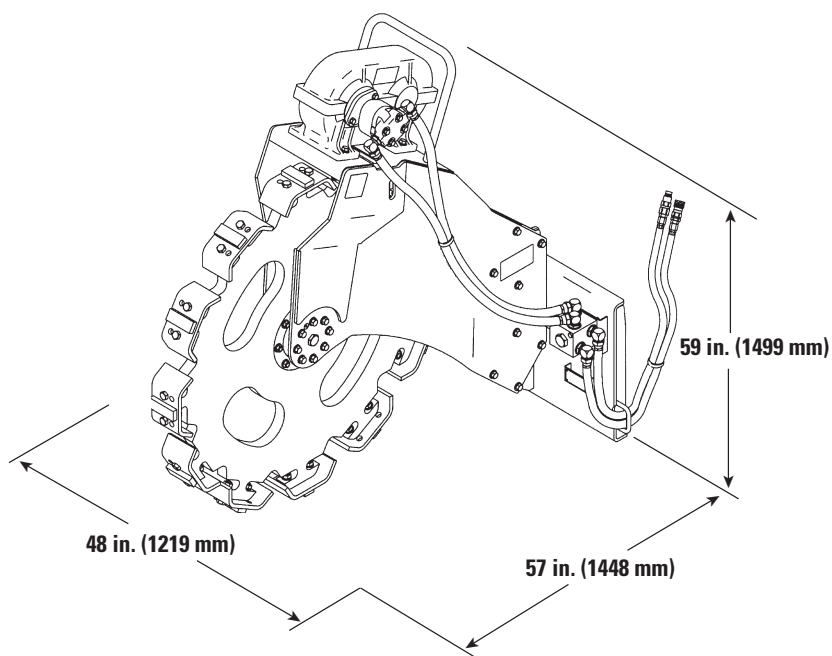

When trenching work is done, the work of the Bobcat trench compactor attachment is just beginning.

The large wheel-type trench compactor attachment compresses soil after power or water lines have been installed. It works most efficiently in trenches four to 12 inches wide and up to four feet deep.

The isolated vibratory shaker box is a double-gear, oil-bath style for long, trouble-free operation. It has a built-in flow regulator to ensure proper RPM.

The trench compactor features replaceable pads.

NOTE - Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat units may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

The Bobcat Attachments Advantage: Bobcat attachments are engineered and manufactured to fit Bobcat loaders for optimum job performance, dependability and durability.

Bobcat Trench Compactor Attachment fits these carrier models:

Skid-Steer Loaders:

S130
S150
S160
S175
S185
S205
S220
S250
S300
S330

Compact Track Loaders:

T140
T180
T190
T250
T300
T320

All-Wheel Steer Loaders:
A300



Revendedor autorizado BOBCAT
Tel: (31) 3492-2772
Site: www.silmaquinas.com.br
E-mail: plinio@silmaquinas.com.br